




Due to the rapid gel characteristics of Polyurea, depth of lift is an important consideration. The liquid Polyurea must be able to penetrate the aggregate layer and make a wet bond to the substrate and previous layers.



**SL/85™** 0.25" SL/85 neat  
[ minimum ]

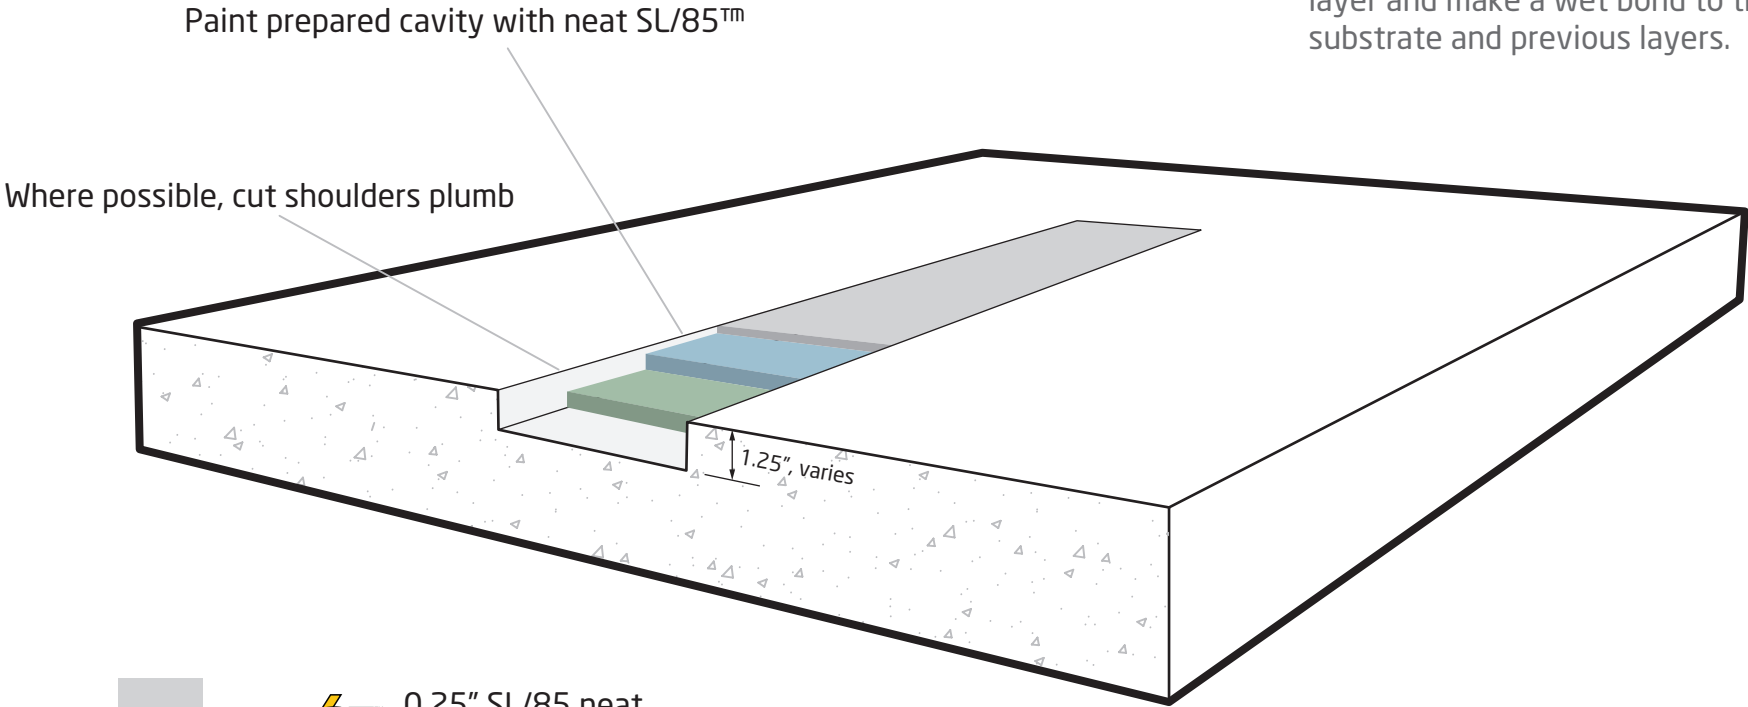

0.50" Intermediate lifts



**SL/85™** 0.50" SL/85 and aggregate  
[ maximum lift ]

Note: Use Maximum 3/8" sharp aggregate with minimum fine sand and dust

Technical Office: 686 S. Adams Street Kansas City, KS 66105 (800) 321-0906	
SCALE: NTS	SL Series Fill Method [ typical detail ]
REVISION: 9/14/2015	