




MEET THE NEW SL/60™

MEETS or EXCEEDS all performance metrics established with the former version of SL/60

Property	Result
Tensile Strength	1,261 psi
Tensile Elongation	777%
Die C Tear Strength	257 pli
100% Modulus	329 psi
200% Modulus	455 psi
300% Modulus	569 psi
Hardness, Shore A	65

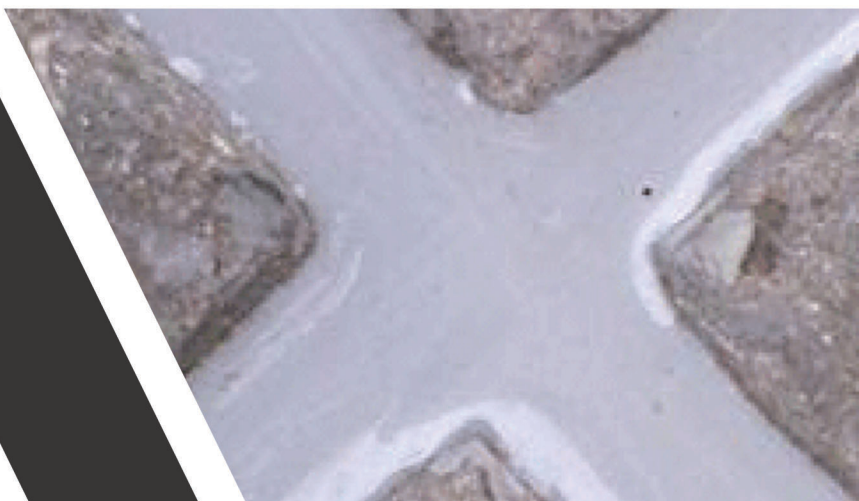

800-324-2810



info@versaflex.com



www.versaflex.com



The VersaFlex Companies
686 South Adams Street
Kansas City, KS 66105



CURES FASTER

Return to Service in 30 minutes



SHAVES EASIER

Stiffer final product

Takes fewer steps to shave off excess



IMPROVED STABILITY FOR CARTRIDGE PRODUCTS

Longer shelf life



EASIER APPLICATION

Levels better, even at faster cure times

Improved flowability, even in narrow cuts