



2021 PARTS & EQUIPMENT CATALOG

POLYUREA
& SPRAY FOAM

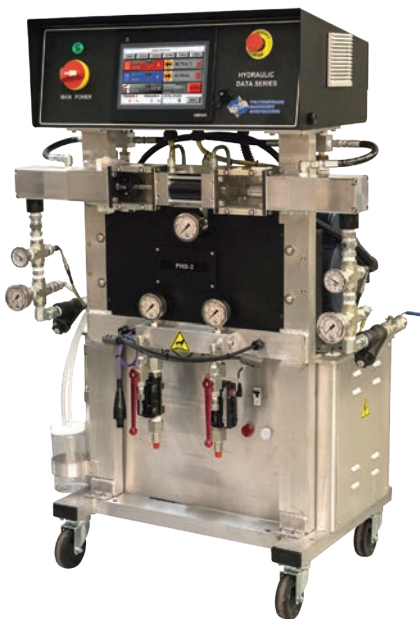


TABLE OF CONTENTS

2 » GRACO EQUIPMENT

2 » SPRAY GUNS

9 » REACTORS (COATINGS & FOAM)

13 » TRANSFER PUMPS AND AGITATOR KITS

15 » HOSES AND ACCESSORIES

19 » PMC EQUIPMENT

19 » SPRAY GUNS

24 » PROPORTIONERS (POLYUREA COATINGS & FOAM)


28 » HOSES AND ACCESSORIES



GRACO®

FUSION AP

GUN

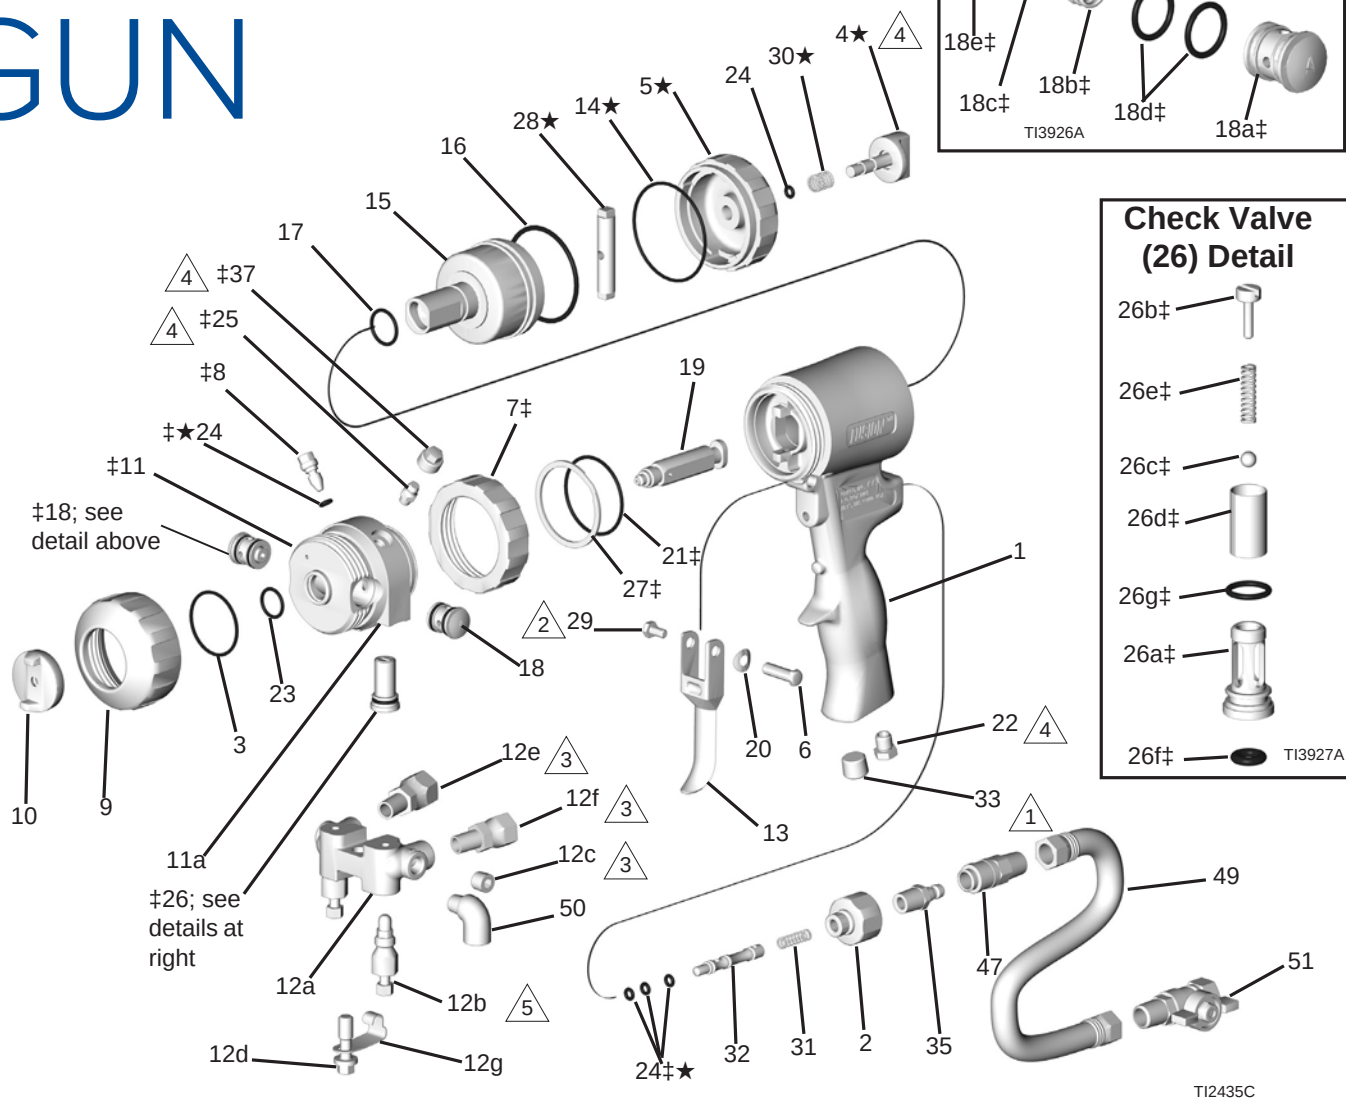

- 1 Torque to 125-135 in-lb (14-15 N•m).
- 2 Torque to 20-30 in-lb (2.3-3.4 N•m).
- 3 Torque to 235-245 in-lb (26.6-27.7 N•m).
- 4 Torque to 35-45 in-lb (4-5 N•m).
- 5 Torque to 32-40 ft-lb (43-54 N•m).


Available Kits	
24W849	Kit, Spare Parts, Fusion AP
15D549	Kit, Gun, Cleaning, Fusion
246355	Kit, Repair, Complete O-ring

REF.	PART	DESCRIPTION	QTY
1	15K365	Handle	1
2	15B208	Plug, air valve	1
3	248137	O-Ring, PTFE, Package of 6	1
4	15B206	Lock, safety	1
5	15B204	Cap, cylinder	1
6	192272	Pin	1
7	15B215	Ring, lock	1
8	15B223	Valve, cleanoff air	1
9	15B211	Ring, retaining	1
10	15B210	Air Cap, for round pattern guns	1
11	246491	Housing, fluid	1
11a	248860	Kit, thread insert, fusion	1
12	246012	Manifold, fluid, 2-hose, includes 12a-12g	1
	249523	Manifold, fluid, 4-hose, includes 12a, 12b, 12d-12g, 50	1
12a		Manifold	1
12b	246356	Valve, fluid	2
12c	100139	Plug, pipe; 1/8-27 npt	2
12d	15B221	Bolt, 5/16-24	1
12e	117634	Swivel, B side; 1/8npt(m) x number 6 JIC(f), for 2-hose manifold	1
12f	117635	Swivel, A side; 1/8npt(m) x number 5 JIC(f), for 2-hose manifold	1
12g	15B993	Spring, ring, lock	1
13	15B209	Trigger	1
14	248136	O-ring, cylinder cap, package of 6	1
15	15B203	Piston	1
16	248135	O-ring, piston; package of 6	1
17	248134	O-ring, piston shaft; package of 6	1
18	246349	Cartridge, seal, A side, SST; includes 18a-18e	1
	246350	Cartridge, seal, B side, SST; includes 18a-18e	1
18a		Cartridge body	1
18b	117491	Spring	1
18c	246348	Seal kit	1
18d	248130	O-ring, cartridge body; package of 6	1
18e	248128	O-ring, side seal, package of 6	1
19		Chamber round (see table ->)	1
20	15C480	Washer, wave	1
21	248132	O-ring; package of 6	1
22	119626	Muffler	1
23	248131	O-ring, package of 6	1
24	246354	O-ring, package of 6	1
25	100846	Fitting, grease	1

REF.	PART	DESCRIPTION	QTY
26	246731	Valve, check, A side, include 26a-26g	1
	246352	Valve, check, B side, include 26a-26g	1
26a		Housing	1
26b	15B214	Screw, 5/16-18 x 1/2 in. (13mm)	1
26c	257420	Ball; carbide, package of 10	1
26d		Screen (choose from the sizes below)	1
	246357	40 mesh filter, 10 pack	1
	246358	60 mesh filter, 10 pack	1
	246359	80 mesh filter, 10 pack	1
26e	117490	Spring	1
26f	248133	O-ring, check valve face, package of 6	1
26g	248129	O-ring, check valve housing; package of 6	1
27	116550	Ring, retaining	1
28	15B205	Stop, piston	1
29	203953	Screw, 10-24 x 3/8 in (10 mm)	1
30	114070	Spring	1
31	117485	Spring	1
32	15B202	Spool, valve	1
33	100721	Plug, pipe, 1/4-18 npt; round and flat pattern guns only	1
35	117509	Quick-disconnect, male, air, 1/4 npt(m), round and flat pattern guns only	1
36	222385	Card, warn ing, not shown	1
37	15B689	Cover, grease fitting	1
46	117792	Grease gun, not shown	1
47	117510	Coupler, air line	1
49	15B772	Hose, air; 1/4 npsm (fbc); 18 in. (0.46 m)	1
50	112307	Elbow, street; 1/8 npt (m x f), round and flat pattern guns only	1
51	15B565	Valve, ball, 1/4 npt (m x f), round and flat pattern guns only	1
55	172479	Tag, warning, not shown	1
56	15D235	Sign, instruction, not shown	1
57	117773	Grease cartridge, 3 oz, not shown	1
65	248279	Grease, tube, 4oz, not shown	1

Chamber Rounds			
	AR2020	Chamber Round 000	1
	AR2929	Chamber Round 00	1
	AR3737	Chamber Round 0	1
	AR4242	Chamber Round 01	1
	AR4747	Chamber Round 01.5	1
	AR5252	Chamber Round 02	1
	AR6060	Chamber Round 03	1
	AR7070	Chamber Round 04	1

FUSION PC GUN

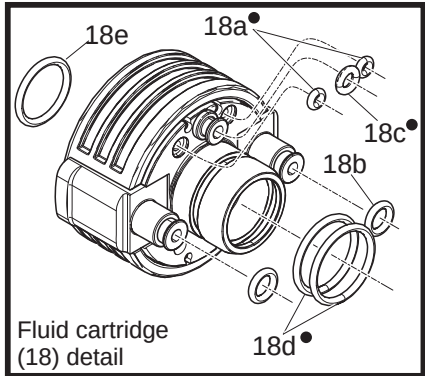

REF.	PART	DESCRIPTION	QTY
1	15K365	Handle	1
2	15B208	Plug, air valve	1
3	248137	O-Ring, PTFE, Package of 6	1
4	15B206	Lock, safety	1
5	15B204	Cap, cylinder	1
6	192272	Pin	1
7	26C775	Ring, lock, Fusion PC, blue	1
8	15B223	Valve, cleanoff air	1
9	19Y302	Ring, retaining, front, Fusion PC	1
10	15B210	Air Cap, for round pattern guns	1
11		Housing, fluid, Fusion PC	1
12	246012	Manifold, fluid, 2-hose, includes 12a-12g	1
12a		Manifold	1
12b	246356	Valve, fluid	2
12c	100139	Plug, pipe; 1/8-27 npt	2
12d	15B221	Bolt, 5/16-24	1
12e	117634	Swivel, B side; 1/8npt(m) x number 6 JIC(f), for 2-hose manifold	1
12f	117635	Swivel, A side; 1/8npt(m) x number 5 JIC(f), for 2-hose manifold	1
12g	15B993	Spring, ring, lock	1
13	15B209	Trigger	1
14	248136	O-ring, cylinder cap, package of 6	1
15	15B203	Piston	1
16	248135	O-ring, piston; package of 6	1
17	248134	O-ring, piston shaft; package of 6	1
18		Cartridge, seal, Fusion PC	1
18a		O-ring, face	1
18b	25P851	O-ring, fluid, package of 6	1
18c		O-ring, air	1
18d		O-ring, rear	1
18e	248131	O-ring, front, package of 6	1
19	PCxxxx	Chamber, mix	1
20	15C480	Washer, wave	1
21	248132	O-ring; package of 6	1
22	119626	Muffler	1
23	248131	O-ring, package of 6	1
24	246354	O-ring, package of 6	1
25	100846	Fitting, grease	1

Cartridge Kits


	19Y300	Kit, Fusion PC Cartridge 1 pack	1
	19Y301	Kit, Fusion PC Cartridge 3 pack	1
	19Y308	Kit, Fusion PC Cartridge 5 pack	1
	25P660	PC Cartridge Tools	1

REF.	PART	DESCRIPTION	QTY
26	246731	Valve, check, A side, include 26a-26g	1
	246352	Valve, check, B side, include 26a-26g	1
26a		Housing	1
26b	15B214	Screw, 5/16-18 x 1/2 in. (13mm)	1
26c	257420	Ball; carbide, package of 10	1
26d		Screen (Available in the sizes below)	1
	246357	40 mesh filter, 10 pack	1
	246358	60 mesh filter, 10 pack	1
	246359	80 mesh filter, 10 pack	1
26e	117490	Spring	1
26f	248133	O-ring, check valve face, package of 6	1
26g	248129	O-ring, check valve housing; pack of 6	1
27	116550	Ring, retaining	1
28	15B205	Stop, piston	1
29	203953	Screw, 10-24 x 3/8 in (10 mm)	1
30	114070	Spring	1
31	117485	Spring	1
32	15B202	Spool, valve	1
33	26C937	Plug, Fusion PC tool holder, 1/4 NPT	1
35	117509	Quick-disconnect, male, air, 1/4 npt(m), round and flat pattern guns only	1
36	222385	Card, warn ing, not shown	1
37	15B689	Cover, grease fitting	1
46	117792	Grease gun, not shown	1
47	117510	Coupler, air line	1
49	15B772	Hose, air; 1/4 npsm (fbc); 18 in. (0.46 m)	1
51	15B565	Valve, ball, 1/4 npt (m x f)	1
55	172479	Tag, warning	1
56	15D235	Sign, instruction, not shown	1
57	117773	Grease cartridge, 3 oz, not shown	1
58	248279	Grease, tube, 4 oz, not shown	1
70		Tool, divider	1
71		Tool, grease	1
72		Screw, jack	1
73		Label, troubleshooting guide	1


Chamber Rounds

	PC20RD	Chamber Round 000	1
	PC29RD	Chamber Round 00	1
	PC37RD	Chamber Round 0	1
	PC42RD	Chamber Round 01	1
	PC47RD	Chamber Round 01.5	1
	PC52RD	Chamber Round 02	1
	PC60RD	Chamber Round 03	1
	PC70RD	Chamber Round 04	1


GRACO® PROBLER P2 SPRAY GUN

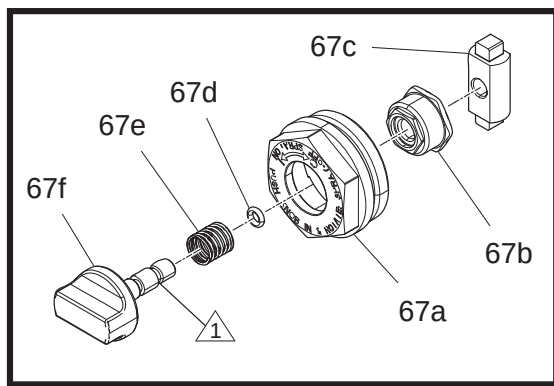

ti34186b

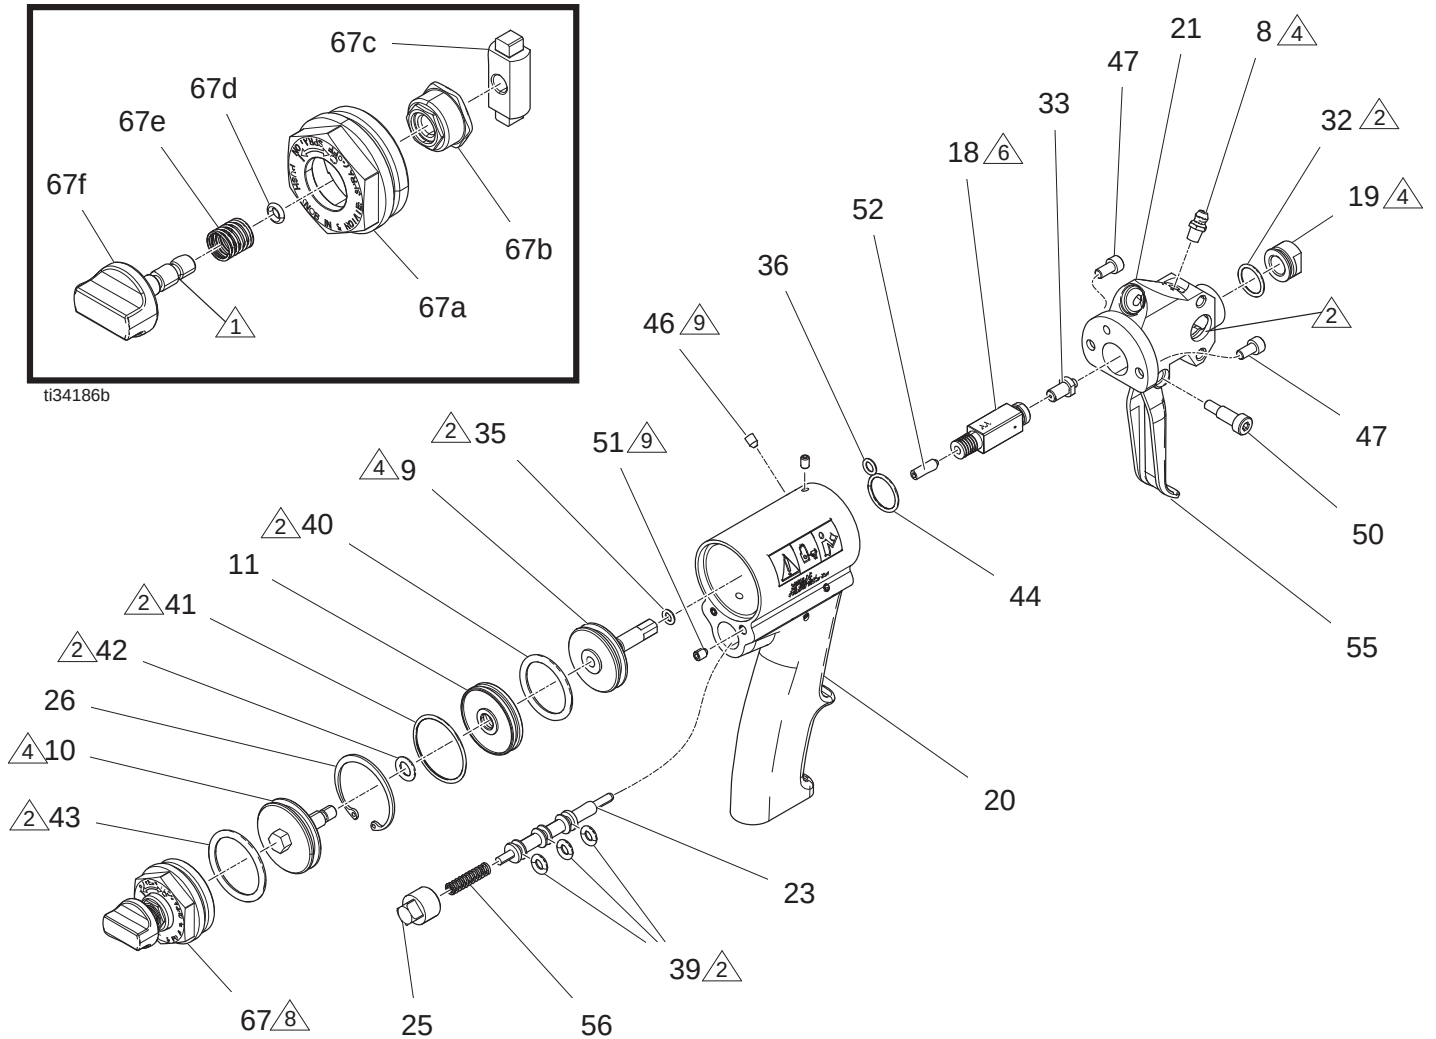

GRACO® PROBLER P2 SPRAY GUN

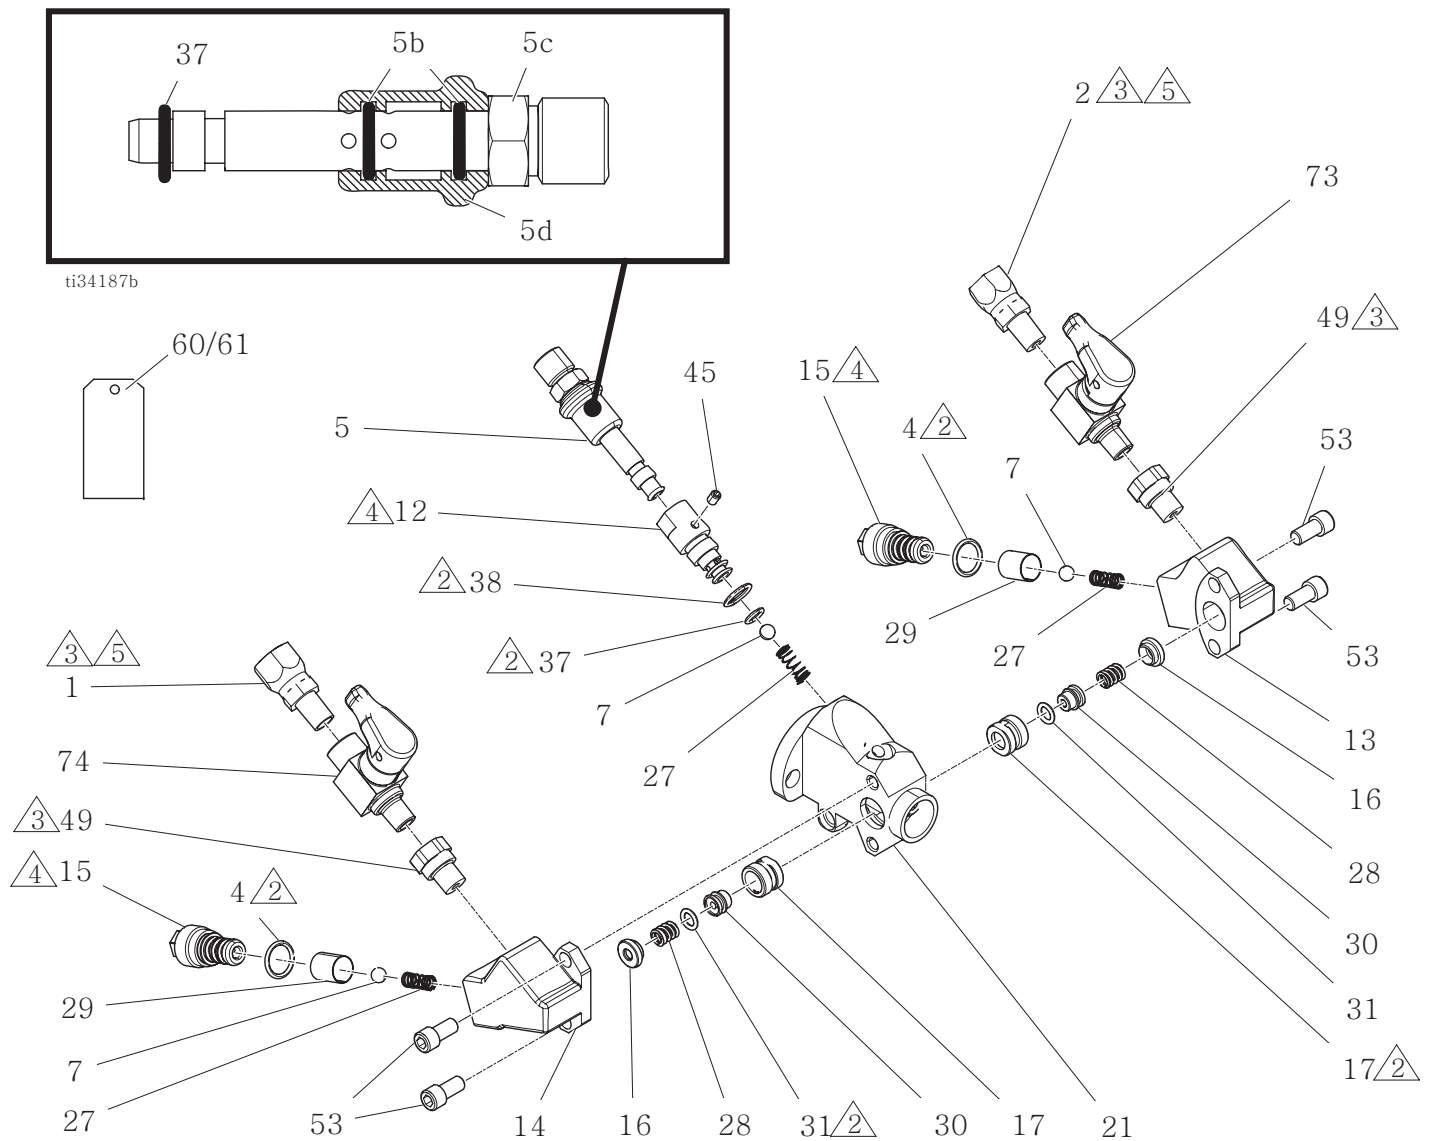

	PART	DESCRIPTION	QTY
1	117634	Swivel, Union #6 JIC	1
2	117635	Swivel, Union #5 JIC	1
4	248130	O-Ring	2
5	GC0128	Switch, Assembly, Air (includes 5b-5d)	1
5b	106555	O-Ring	2
5c	GC0126	Tube, Switch, Air	1
5d	GC0127	Spool, Switch, Air	1
7	GC0259	Ball, 1/4 Dia.	3
8	100846	Fitting, zerk st	1
9	GC1898	Piston, air, 1-3/8	1
10	GC1899	Piston, air, 1-1/2	1
11	GC1900	Spacer, cylinder	1
12	GC1901	Insert, Valve, Air	1
13	16N599	Block, Side, ISO, P2	1
14	16N600	Block, Side, RES, P2	1
15	16P010	Filter, Valve, Check	2
16	GC2494	Seal	2
17	GC2495	Housing, Seal	2
18	GC250A	Module, mix chamber, model GCP2RA	1
	GC2500	Module, mix chamber, model GCP2R0	1
	GC2501	Module, mix chamber, model GCP2R1	1
	GC2502	Module, mix chamber, model GCP2R2	1
	GC2503	Module, mix chamber, model GCP2R3	1
	GC2504	Module, mix chamber, model GCP2R4	1
	GC2505	Module, mix chamber, model GCP2R5	1
19	GC1914	Tip, front	1
20	16A037	Handle, machined, P2 gun	1
21	GC1916	Head, Probler 2	1
23	GC1918	Piston, trigger	1
25	GC1920	Plug, trigger	1
26	GC1921	Ring, retaining, internal	1
27	GC1922	Spring	3
28	GC1923	Spring	2
29	GC2496	Screen, Filter, 40 Mesh	2
30	GC2498	Seal, Side, P2	2
31	111450	Packing, O-ring	2
32	117517	O-ring	1

33	GC251A	Insert, mix chamber, 0.036. model GCP2RA	1
	GC2510	Insert, mix chamber, 0.051. model GCP2R0	1
	GC2511	Insert, mix chamber, 0.059. model GCP2R1	1
	GC2512	Insert, mix chamber, 0.073. model GCP2R2	1
	GC2513	Insert, mix chamber, 0.088. model GCP2R3	1
	GC2514	Insert, mix chamber, 0.100. model GCP2R4	1
	GC2515	Insert, mix chamber, 0.125. model GCP2R5	1
35	C20988	Packing O-ring	1
36	GC2056	O-ring	1
37	110242	Packing, O-ring	2
39	GC2058	O-ring	3
40	108833	Packing, O-ring	1
41	107563	Packing, O-ring	1
42	GC2059	O-ring	1
43	C20207	Packaging, o-ring	1
44	GC2060	O-ring	1
45	GC2079	Screw, Set	1
46	GC2081	Screw, set	11
47	GC2187	Screw, shdc	2
49	15U395	Adapter, M x F 18, NPT	2
50	GC2237	Screw, shoulder	1
51	GC2241	Screw, set	2
52	GC2243	Screw, set	1
53	GC2248	Screw, SHDC	4
54	15B772	Hose, air, 18 in.	1
55	GC2340	Trigger, Probler 2	1
56	GC2341	Spring, compression	1
60	172479	Tag, Warning	1
61	222385	Label, Safety warning, Med. alert	1
67	258761	Piston safety lock, assembly, P2	1
67b		Nut, adjustment, safety stop, P2	1
67c		Stop, piston, P2	1
67d		Spring, compression	1
67e		O-ring	1
67f		Shaft, safety stop, P2	1
73	256459	Valve, Ball Assembly, ISO	1
74	256460	Valve, Ball Assembly, RES	1
	GC1950	Kit Repair Premium P2	1
	GC1946	Kit, Side Seal	1

GRACO® REACTORS

POLYUREA SPRAY COATINGS



A-XP1 (AIR)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
3500 psi (240 bar, 24.0 MPa)	N/A	210 ft (64 m)	170°F (77°C)	1.5 gal (5.7 L) / min	250 lb (114 kb)	No	24Y165 230V, 1-ph -56A 230V, 3-ph -46A 230V, 3-ph -26A	‡	3A1509	3A1570



E-10hp (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2500 psi (172 bar, 17.2 MPa)	N/A	104 ft (32 m)	170°F (77°C)	1 gal (3.81 L) / min	239 lb (108 kb)	No	120V 24T100 230V 24T900	‡	332144	332144



E-XP1 (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2500 psi (172 bar, 17.2 MPa)	N/A	210 ft (64 m)	190°F (88°C)	1 gal (3.81 L) / min	342 lb (155 kb)	YES	With 10.2 kW heater: 230V, 1-ph -69A 259024 230V, 3-ph -43A 259033 230V, 3-ph -26A 259029	‡	312065	312066



REACTOR 2 E-XP2 (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
3500 psi (240 bar, 24.0 MPa)	N/A	310 ft (94 m)	190°F (88°C)	2 gal (7.6 L) / min	350 lb (159 kb)	Yes	With 15.3 kW heater: 272112 - Elite 272012 - Standard *amp 230V - 1-ph 100A 230V - 3-ph 59A 400V - 3-ph 35A	± Δ	333023	333024



REACTOR 2 H-XP2 (HYDRAULIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
3500 psi (240 bar, 24.0 MPa)	1200 psi (83 bar, 8.3 MPa)	310 ft (94 m)	190°F (88°C)	1.5 gal (5.7 L) / min	556 lb (252 kb)	YES	With 15.3 kW heater: 17H162 - Elite 17H062 - Standard *amp 230V - 1-ph 100A 230V - 3-ph 59A 400V - 3-ph 35A	± Δ	334945	334946



REACTOR 2 H-XP3 (HYDRAULIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
3500 psi (240 bar, 24.0 MPa)	850 psi (59 bar, 5.9 MPa)	410 ft (125 m)	190°F (88°C)	2.8 gal (10.6 L) / min	600 lb (272 kb)	YES	With 20.4 kW heater: 230V - 3-ph 95A 17H174 - Elite 17H074 - Standard 400V - 3-ph 35A 17H176 - Elite 17H076 - Standard	± Δ	334945	334946

GRACO® REACTORS

SPRAY FOAM



A-25 (AIR)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	N/A	210 ft (64 m)	190°F (88°C)	25 lb (11.4kg)/ min	250 lb (114 kb)	No	With 6.0kW heater: 262614 *amp 230V, 1-ph -40A 230V, 3-ph -32A 230V, 3-ph -18.5A	‡	3A1569	3A1570



E-10 (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	N/A	105 ft (32 m)	160°F (71°C)	12 lb (5.4kg)/ min	Heated: 160lb (72kg) Unheated: 150lb (68kg)	No	With 1.7kW heater: 120V, 2-cord 249570 With 2.0kW heater: 240V, 2-cord 249571 Unheated ambient: 120V - 249576 240V - 249577	‡	311075	311075



E-20 (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	ORDERING INFO	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	N/A	210 ft (64 m)	190°F (88°C)	20 lb (9kg)/ min	342 lb (155 kb)	YES	With 6.0 kW heater: 230V, 1-ph -48A 259025 230V, 3-ph -32A 259034 400V, 3-ph -24A 259030	‡	312065	312066



REACTOR 2 E-30 (ELECTRIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	N/A	310 ft (94 m)	190°F (88°C)	30 lb (13.6kg)/min	355 lb (161 kb)	Yes	± Δ	333023	333024
ORDERING INFO With 10.2 kW heater: 272110 - Elite 272010 - Standard With 15.3 kW heater: 272111 - Elite 272011 - Standard *amp									



REACTOR 2 H-30 (HYDRAULIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	700 psi (48 bar, 4.8 MPa)	310 ft (94 m)	190°F (88°C)	28 lb (12.3kg)/min	10kW: 530lb (240 kg) 15kW: 556lb (252 kg)	Yes	± Δ	334945	334946
ORDERING INFO With 10.2 kW heater: 17H131 - Elite 17H031 - Standard With 15.3 kW heater: 17H132 - Elite 17H032 - Standard *amp									



REACTOR 2 H-40 (HYDRAULIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	600 psi (41 bar, 4.1 MPa)	410 ft (125 m)	190°F (88°C)	45 lb (20kg)/min	600lb (272 kg)	Yes	± Δ	334945	334946
ORDERING INFO With 15.3 kW heater: 230V, 3-ph - 71A 17H143 - Elite 17H043 - Standard 400V, 3-ph - 41A: 17H145 - Elite 17H045 - Standard With 20.4 kW heater: 230V, 3-ph - 95A 17H144 - Elite 17H044 - Standard 400V, 3-ph - 52A: 17H146 - Elite 17H046 - Standard									



REACTOR 2 H-40 (HYDRAULIC)

MAX WORKING PRESSURE	MIN WORKING PRESSURE	MAX HOSE LENGTH	MAX FLUID TEMP	OUTPUT	WEIGHT	REACTOR APP COMPAT.	PACKAGES	OPERATION MANUAL	REPAIR MANUAL
2000 psi (138 bar, 13.8 MPa)	600 psi (41 bar, 4.1 MPa)	410 ft (125 m)	190°F (88°C)	52 lb (23.6kg)/min	600lb (272 kg)	Yes	± Δ	334945	334946
ORDERING INFO With 20.4 kW heater: 230V, 3-ph - 95A 17H144 - Elite 17H044 - Standard 400V, 3-ph - 52A: 17H146 - Elite 17H046 - Standard									

GRACO®

TRANSFER PUMPS

TECHNICAL SPECIFICATIONS

	PART NUMBER	RATIO	MAX OUTPUT - CONTINUOUS	MAX INPUT - AIR PRESSURE	MAX OUTPUT - FLUID PRESSURE	MAX AMBIENT TEMP	MAX FLUID TEMP	WEIGHT	HEIGHT	MANUAL NUMBER	WETTED MATERIALS
T1	256200	2:1	9.5 lpm (2.5 gpm)	12 bar (180 psi, 1.2 MPa)	28 bar (405 psi, 2.8 MPa)	49°C (120°F)	88°C (190°F)	8.4 kg	131 cm (51.5 in)	312766	Stainless Steel
T2	295616	2.25:1	19 lpm (5.0 gpm)	12 bar (180 psi, 1.2 MPa)	28 bar (405 psi, 2.8 MPa)	49°C (120°F)	88°C (190°F)	9.5 kg	137 cm (54 in)	311882	Stainless Steel
T3 SST	26A304	3:1	17 lpm (4.5 gpm)	6.8 bar (100 psi, 0.68 MPa)	21.7 bar (315 psi, 2.17 MPa)	49°C (120°F)	88°C (190°F)	10 kg	128 cm (50.3 in)	3A5180	Stainless Steel
T3 CS	24Z834	3:1	17 lpm (4.5 gpm)	6.8 bar (100 psi, 0.68 MPa)	21.7 bar (315 psi, 2.17 MPa)	49°C (120°F)	88°C (190°F)	10 kg	128 cm (50.3 in)	3A5180	Carbon Steel

ORDERING INFORMATION

T1 TRANSFER PUMP

256200 Graco T1 2:1 Transfer Pump

247955 Two Graco T1 2:1 Transfer Pumps, air supply kit, 3 m x 19 mm (10 ft x 3/4 in) supply hose and fittings

247956 Two Graco T1 2:1 Transfer Pumps and 3 m x 19 mm (10 ft x 3/4 in) supply hose

T2 TRANSFER PUMP

295616 Graco T2 2.25:1 Transfer Pump

246081 Two Graco T2 2.25:1 Transfer Pumps, air supply kit, 3 m x 19 mm (10 ft x 3/4 in) supply hose and fittings

246898 Two Graco T2 2.25:1 Transfer Pumps and 3 m x 19 mm (10 ft x 3/4 in) supply hose

T3 STAINLESS STEEL

26A304 T3 pump

24Z988 T3 pump package includes 2 pumps and fluid supply kit

24Z987 T3 pump package includes 2 pumps, fluid supply kit and air hose kit

T3 CARBON STEEL

24Z834 T3 pump

25D296 T3 pump package includes 2 pumps and fluid supply kit

25D295 T3 pump package includes 2 pumps, fluid supply kit and air hose kit

SUPPLY PUMP ACCESSORIES

246419 208L (55 gal) feed pump tube with inlet ball check

246477 19mm (3/4 in) bung return tube with air dryer port

246483 Air distribution kit, 8.4 bar (120 psi, 0.84 MPa) for two feed pumps and a Fusion gun

247616 Desiccant dryer kit

246978 Reactor manifold circulation kit with return tubes, return fluid lines and dryers

15C381 Desiccant replacement



AGITATORS

Agitators and Accessories

26C150 Expandable blade mixer, extended shaft, high viscosity, up to 2000 centipoise

26C818 Expandable Blade mixer, extended shaft, low viscosity, up to 1000 centipoise

17V342 Extended shaft and blade kit or retrofit existing agitators

224854 Twistork CS, air-operated, 1-1/2 HP, 37.3 in (0.9 m) length

235534 Twistork SST, air-operated, 1-1/2 HP, 37.3 in (0.9m) length

235534 Twistork SST, air-operated with built in return tube, 3/4 HP, 47.5 in (1.2 m) length

224854 Twistork CS, air-operated (224854), 1-1/2 HP, 37.3 in (0.9 m) with air hose

24G621 Agitator speed control



AIR DRIVEN EXPANDING BLADE AGITATORS

PART NUMBER	26C150	26C818
MAX WORKING PRESSURE	100 psi (0.7 MPa, 7 bar)	100 psi (0.7 MPa, 7 bar)
MAX CENTI-POISE	2000 cps	1000 cps
MAX RECOMMEND SPEED	500 rpm	500 rpm
AIR CONSUMPTION	22 scfm (0.62 m ³ /min)	12 scfm (0.34 m ³ /min)
WEIGHT	13.3 lb (6.0 kg)	9.8 lb (4.5 kg)
BUNG ADAPT THREAD SIZE	1.5 - 11.5 npsm & 2 - 11.5 npsm	1.5 - 11.5 npsm & 2 - 11.5 npsm
WETTED PARTS	303, 18-8 & 304 sst	303, 18-8 & 304 sst

COMPLETE SUPPLY PUMP SYSTEMS

Includes two pumps, all air and fluid fittings, and hoses for both pumps

247955 Complete T1 (247956) supply pump system

246081 Complete T2 (246898) supply pump system

24Z988 Complete T3 (stainless steel) supply pump system

25D295 Complete T3 (carbon steel) supply pump system

246655 Complete Triton® 308 (246677) supply pump system

24Z988 Complete Husky™ 515 (246481) supply pump system

24Z988 Complete Husky™ 716 (246482) supply pump system

24Z988 Complete Husky™ 1050 (246676) supply pump system

GRACO®

HOSES & ACCESSORIES



REACTOR 2 LOW-PRESSURE FLOW METER HARDWARE KITS

FOR REACTOR E-30 NON-ELITE MODELS (2018 AND OLDER)	25N749	Flow Meter kit - includes flow meters, Y-strainers with inlet sensors, Motor Control Module (MCM), all cables and mounting hardware
FOR REACTOR E-30 NON-ELITE MODELS (2019 AND NEWER)	25N786	Flow Meter kit - includes flow meters, inlet sensors, all cables and mounting hardware
FOR REACTOR E-30 ELITE MODELS	25N913	Flow Meter kit - includes flow meters, Y-strainers with inlet sensors, all cables and mounting hardware
FOR REACTOR E-30I (GENERATION 2)	25N926	Flow Meter kit - includes flow meters, Y-strainers with inlet sensors, all cables and mounting hardware
FOR REACTOR H-30, H-40 AND H-50 NON-ELITE MODELS	25N786	Flow Meter kit - includes flow meters, inlet sensors, all cables and mounting hardware
FOR REACTOR H-30, H-40 AND H-50 ELITE MODELS	25N748	Flow Meter kit - includes flow meters, all cables and mounting hardware



REACTOR 2 HIGH-PRESSURE FLOW METER HARDWARE KITS

FOR REACTOR E-XP2 NON-ELITE MODELS (2018 AND OLDER)	25P384	Flow Meter kit - includes flow meters, Y-strainers with inlet sensors, Motor Control Module (MCM), all cables and mounting hardware
FOR REACTOR E-XP2 NON-ELITE MODELS (2019 AND NEWER)	25P385	Flow Meter kit - includes flow meters, inlet sensors, all cables and mounting hardware
FOR REACTOR E-XP2 ELITE MODELS (2018 AND OLDER)	25P386	Flow Meter kit - includes flow meters, all cables and mounting hardware
FOR REACTOR E-XP2 ELITE MODELS (2019 AND NEWER)	25P383	Flow Meter kit - includes flow meters, all cables and mounting hardware
FOR REACTOR E-XP2I (GENERATION 2)	25P387	Flow Meter kit - includes flow meters, Y-strainers with inlet sensors, all cables and mounting hardware
FOR REACTOR H-XP2 AND H-XP3 NON-ELITE MODELS	25P385	Flow Meter kit - includes flow meters, inlet sensors, all cables and mounting hardware
FOR REACTOR H-XP2 AND H-XP3 ELITE MODELS	25P383	Flow Meter kit - includes flow meters, all cables and mounting hardware

HOSE SCUFF GUARD KITS



25M493	Xtreme-Wrap for 50 ft hose section
25M494	Xtreme-Wrap for 10 ft hose section
25M495	Joint Protector
246077	10 ft (3 m) braided polyester mesh scuff guard
246805	25 ft (3 m) braided polyester mesh scuff guard
246078	50 ft (3 m) braided polyester mesh scuff guard
246456	50 ft (3 m) polyethylene scuff guard

WHIP HOSES



25P770	LP 1/4 in x 10 ft (6.3 mm x 3m) Improved Flex with Xtreme-Wrap Scuff Guard
25P771	LP 1/4 in x 20 ft (6.3 mm x 6m) Improved Flex with Xtreme-Wrap Scuff Guard
25P772	HP 1/4 in x 10 ft (6.3 mm x 3m) Improved Flex with Xtreme-Wrap Scuff Guard
25P773	HP 1/4 in x 20 ft (6.3 mm x 6m) Improved Flex with Xtreme-Wrap Scuff Guard
246050	LP 1/4 in x 10 ft (6.3 mm x 3m) Xtreme-Wrap Scuff Guard
26C042	LP 1/4 in x 20 ft (6.3 mm x 6m) Xtreme-Wrap Scuff Guard
246055	HP 1/4 in x 10 ft (6.3 mm x 3m) Xtreme-Wrap Scuff Guard
26C043	HP 1/4 in x 20 ft (6.3 mm x 6m) Xtreme-Wrap Scuff Guard
246056	HP 3/8 in x 10 ft (9.5 mm x 3m) Scuff Guard
249586	LP 1/4 in x 3 ft (6.3 mm x 91cm) Scuff Guard

HOSE ACCESSORIES



24K207	FTS Kit with Resistance Temperature Detector
24N450	50 ft (15 m) Resistance Temperature Detector Cable
261669	FTS Kit with Thermocouple
24J523	50 ft (15 m) Thermocouple cable

LOW PRESSURE HEATED HOSES

Low pressure, 2000 psi (138 bar, 13.8 Mpa)



1/4 in (6.3 mm) diameter	
246048	LP 1/4 in x 25 ft (6.3 mm x 7.6 m), Thermocouple
249587	LP 1/4 in x 25 ft (6.3 mm x 7.6 m), Ground Wire
246045	LP 1/4 in x 50 ft (6.3 mm x 15 m), Thermocouple
246074	LP 1/4 in x 50 ft (6.3 mm x 15 m), Ground Wire
3/8 in (9.5 mm) diameter	
246049	LP 3/8 in x 25 ft (9.5 mm x 7.6 m), Thermocouple
261328	LP 3/8 in x 25 ft (9.5 mm x 7.6 m), Ground Wire
246046	LP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple
246075	LP 3/8 in x 50 ft (9.5 mm x 15 m), Ground Wire
256549	LP 3/8 in x 50 ft (9.5 mm x 15 m), Ground Wire w/ scuff guard
24Y549	LP 3/8 in x 50 ft (9.5 mm x 15 m), Ground Wire w/ Xtreme-Wrap Scuff Guard
246678	LP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple w/ scuff guard
24Y678	LP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple w/ Xtreme-Wrap Scuff Guard
24T839	LP 3/8 in x 50 ft (9.5 mm x 15 m), RTD
24K240	LP 3/8 in x 50 ft (9.5 mm x 15 m), RTD w/ scuff guard
24Y240	LP 3/8 in x 50 ft (9.5 mm x 15 m), RTD w/ Xtreme-Wrap Scuff Guard
24K394	LP 3/8 in x 50 ft (9.5 mm x 15 m), RTD and CAN w/ scuff guard
24Y394	LP 3/8 in x 50 ft (9.5 mm x 15 m), RTD and CAN w/ Xtreme-Wrap Scuff Guard
1/2 in (12.7 mm) diameter	
246047	LP 1/2 in x 50 ft (12.7 mm x 15 m), Thermocouple
246076	LP 1/2 in x 50 ft (12.7 mm x 15 m), Ground Wire
24N000	LP 1/2 in x 50 ft (12.7 mm x 15 m), RTD w/ scuff guard
24N001	LP 1/2 in x 50 ft (12.7 mm x 15 m), RTD and CAN w/ scuff guard

HIGH PRESSURE HEATED HOSES

High pressure, 3500 psi (240 bar, 24.0 Mpa)



3/8 in (9.5 mm) diameter	
246053	HP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple
249588	HP 3/8 in x 50 ft (9.5 mm x 15 m), Ground Wire
246679	HP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple w/ scuff guard
24Y679	HP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple w/ Xtreme-Wrap Scuff Guard
24U743	HP 3/8 in x 50 ft (9.5 mm x 15 m), RTD
24K241	HP 3/8 in x 50 ft (9.5 mm x 15 m), RTD w/ scuff guard
24Y241	HP 3/8 in x 50 ft (9.5 mm x 15 m), RTD w/ Xtreme-Wrap Scuff Guard
24K395	HP 3/8 in x 50 ft (9.5 mm x 15 m), RTD and CAN w/ scuff guard
24Y395	HP 3/8 in x 50 ft (9.5 mm x 15 m), RTD and CAN w/ Xtreme-Wrap Scuff Guard
1/2 in (12.7 mm) diameter	
246054	HP 1/2 in x 50 ft (12.7 mm x 15 m), Thermocouple
261335	HP 1/2 in x 50 ft (12.7 mm x 15 m), Ground Wire
256548	HP 1/2 in x 50 ft (12.7 mm x 15 m), Thermocouple w/ scuff guard
24N002	HP 1/2 in x 50 ft (12.7 mm x 15 m), RTD w/ scuff guard
24N003	HP 1/2 in x 50 ft (12.7 mm x 15 m), RTD and CAN w/ scuff guard



EXTRA HIGH PRESSURE HEATED HOSES







EXTRA High pressure, 5000 psi (345 bar, 34.5 Mpa)



3/8 in (9.5 mm) diameter	
261332	XHP 3/8 in x 25 ft (9.5 mm x 7.6 m), Ground Wire
262203	XHP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple
248908	XHP 3/8 in x 50 ft (9.5 mm x 15 m), Thermocouple w/ no air line

PMC AP-2 SPRAY & POUR GUN

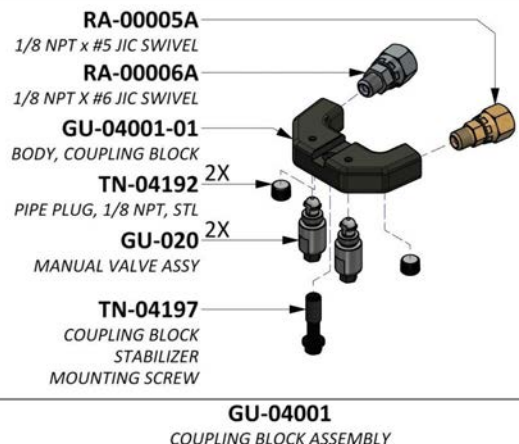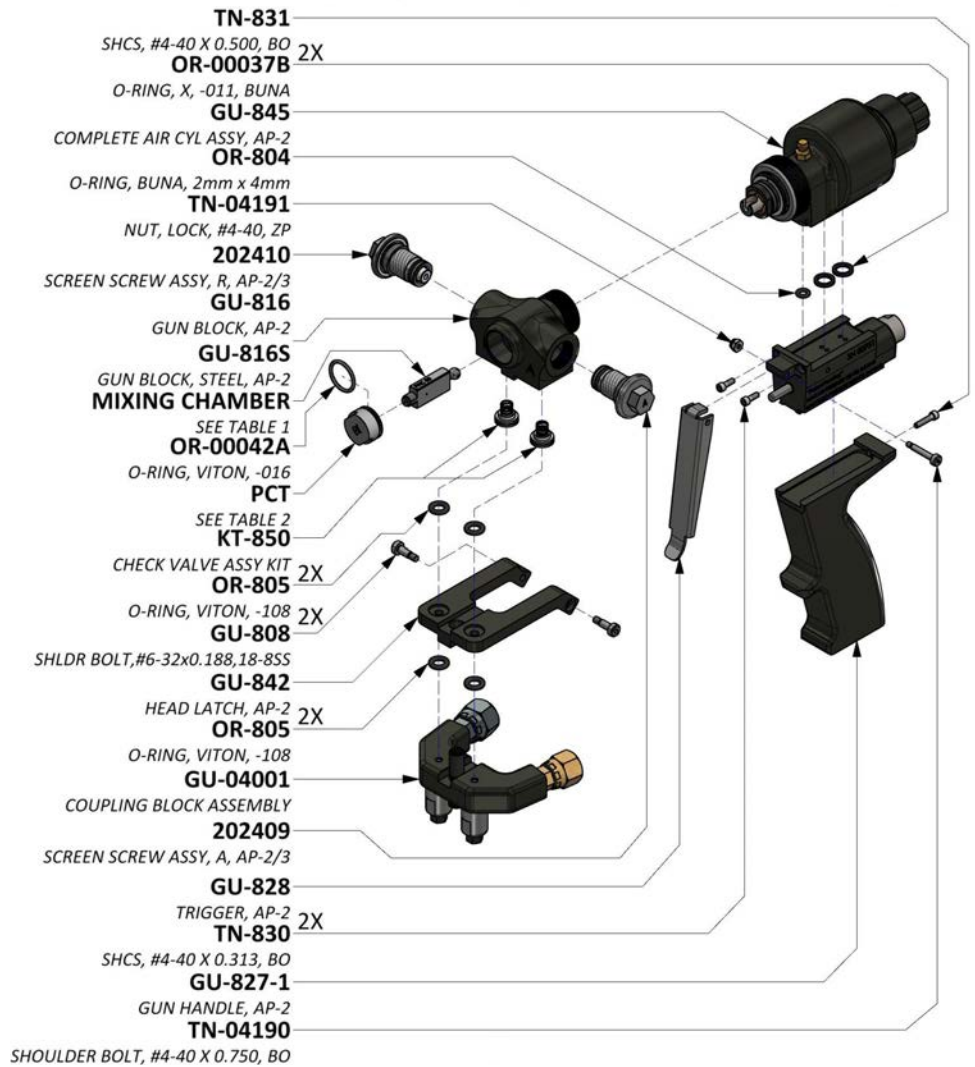

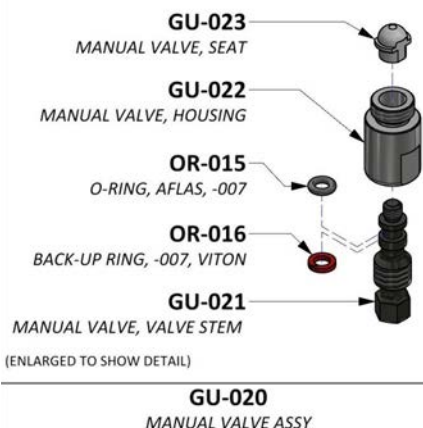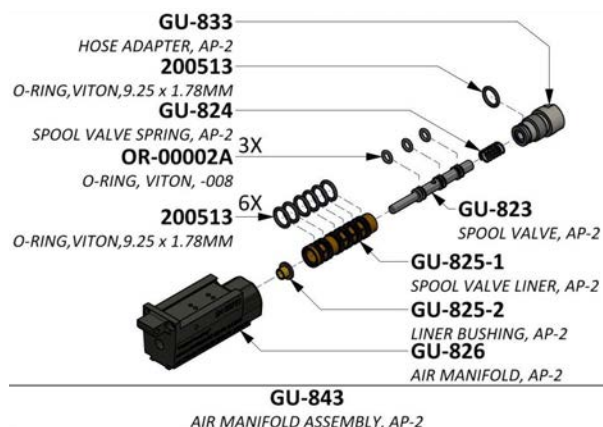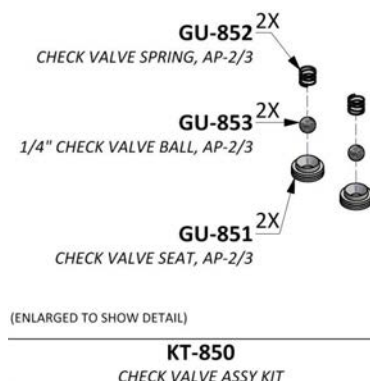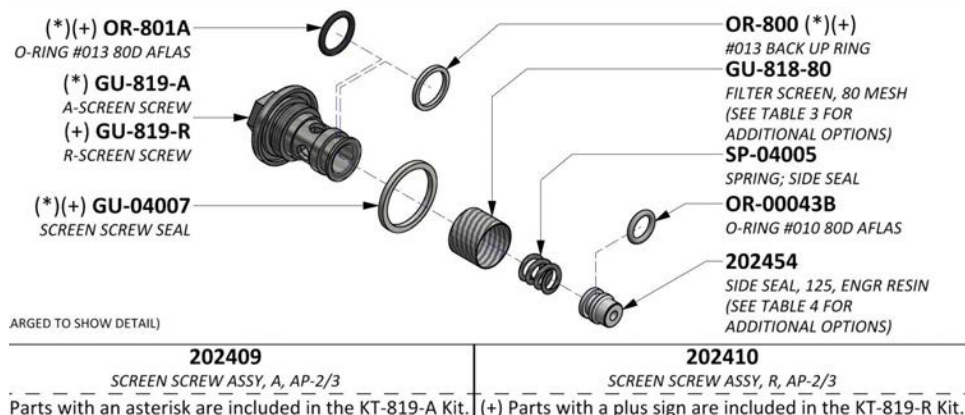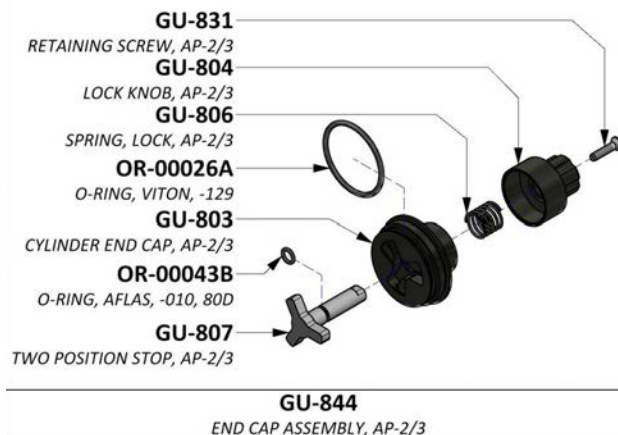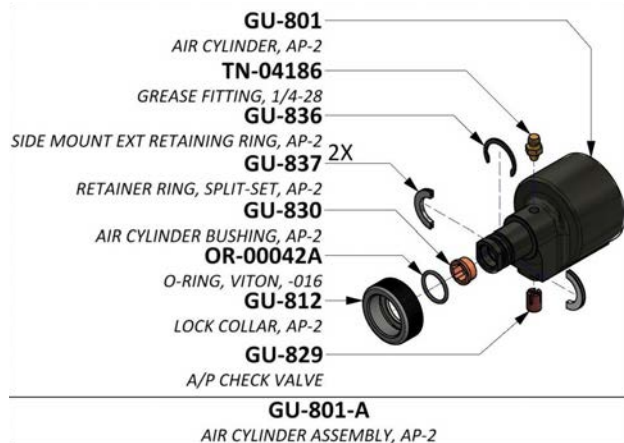





MIXING CHAMBER KITS			
PART #	DESCRIPTION	PART #	DESCRIPTION
GU-814-DP-000	Chamber, 000 W/ drills, DP	GU-814-DP-02	Chamber, 02 W/ drills, DP
GU-814-DP-00	Chamber, 00 W/ drills, DP	GU-814-DP-02X	Chamber, 02X W/ drills, DP
GU-814-DP-00X	Chamber, 00X W/ drills, DP	GU-814-DP-03	Chamber, 03 W/ drills, DP
GU-814-DP-01	Chamber, 01 W/ drills, DP	GU-814-DP-04	Chamber, 04 W/ drills, DP
GU-814-DP-01X	Chamber, 01X W/ drills, DP	GU-814-DP-05	Chamber, 05 W/ drills, DP

PATTERN CONTROL TIP (PTC) KITS			
PART #	DESCRIPTION	PART #	DESCRIPTION
GU-815-000	PCT, 000 w/ Drills	GU-815-02	PCT, 02 w/ Drills
GU-815-00	PCT, 00 w/ Drills	GU-815-02X	PCT, 02X w/ Drills
GU-815-00X	PCT, 00X w/ Drills	GU-815-03	PCT, 03 w/ Drills
GU-815-01	PCT, 01 w/ Drills	GU-815-04	PCT, 04 w/ Drills
GU-815-01X	PCT, 01X w/ Drills	200919	PCT, 05 w/ Drills



FILTER SCREEN OPTIONS		SIDE SEAL OPTIONS	
PART #	DESCRIPTION	PART #	DESCRIPTION
GU-818-40	Filter Screen, 40 Mesh	202247	Side Seal, 125, Steel
GU-818-60	Filter Screen, 60 Mesh	202248	Side Seal, 125, Delrin
GU-818-80 (±)	Filter Screen, 80 Mesh	202454 (±)	Side Seal, 125, Engr Resin

PMC AP-3 SPRAY & POUR GUN

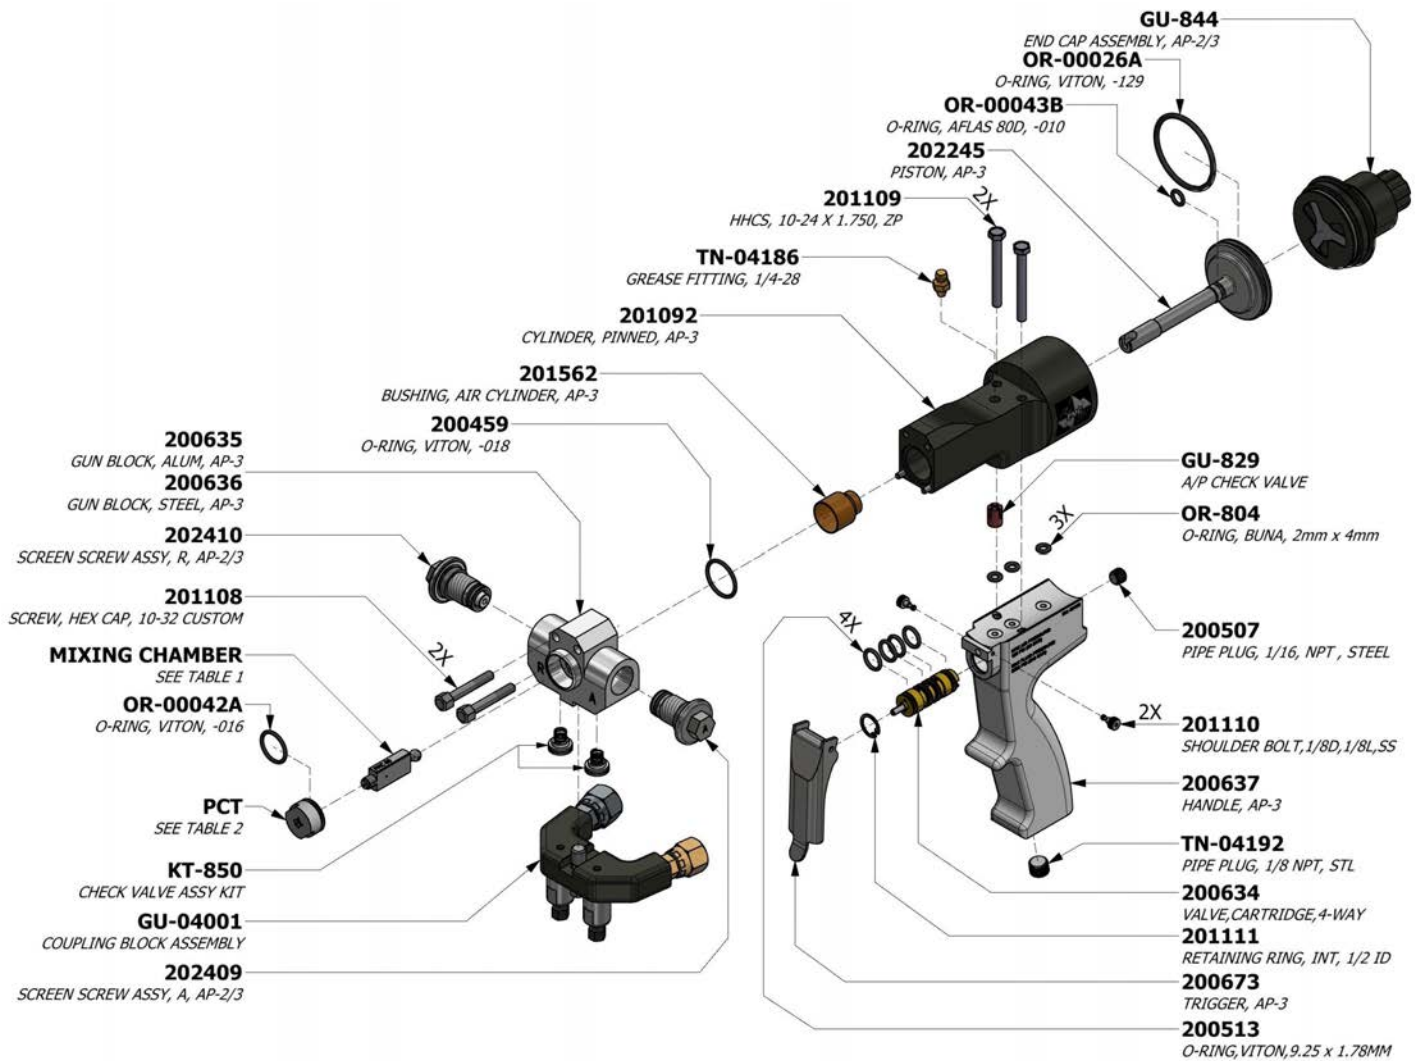

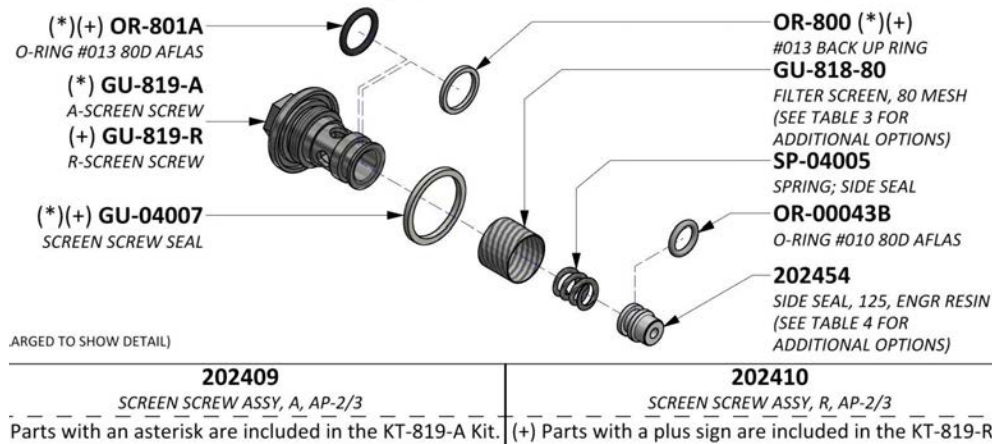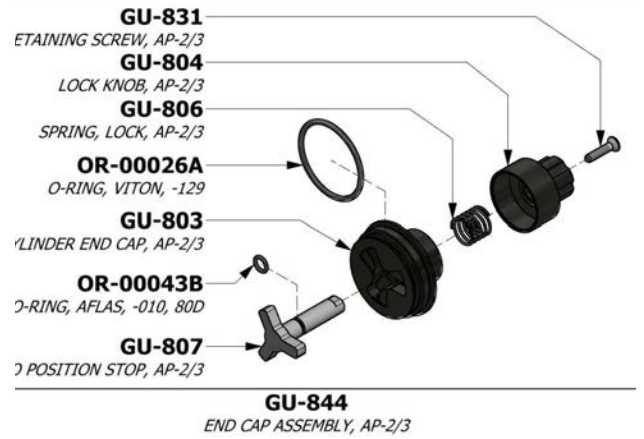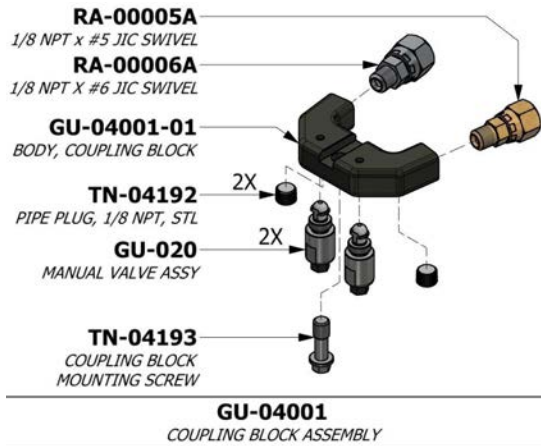

Parts with an asterisk are included in the KT-819-A Kit. (+) Parts with a plus sign are included in the KT-819-R Kit.

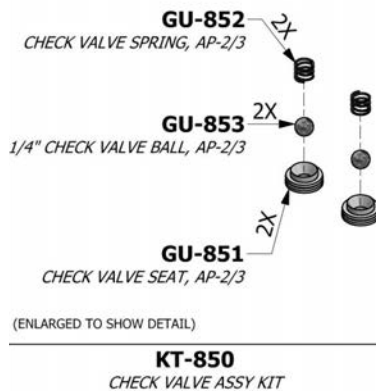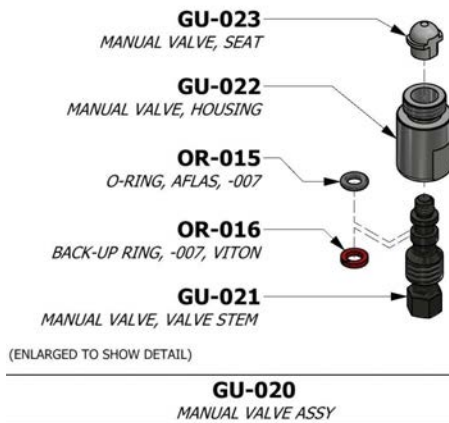

MIXING CHAMBER KITS

PART #	DESCRIPTION	PART #	DESCRIPTION
GU-814-DP-000	Chamber, 000 W/ drills, DP	GU-814-DP-02	Chamber, 02 W/ drills, DP
GU-814-DP-00	Chamber, 00 W/ drills, DP	GU-814-DP-02X	Chamber, 02X W/ drills, DP
GU-814-DP-00X	Chamber, 00X W/ drills, DP	GU-814-DP-03	Chamber, 03 W/ drills, DP
GU-814-DP-01	Chamber, 01 W/ drills, DP	GU-814-DP-04	Chamber, 04 W/ drills, DP
GU-814-DP-01X	Chamber, 01X W/ drills, DP	GU-814-DP-05	Chamber, 05 W/ drills, DP

PATTERN CONTROL TIP (PTC) KITS

PART #	DESCRIPTION	PART #	DESCRIPTION
GU-815-000	PCT, 000 w/ Drills	GU-815-02	PCT, 02 w/ Drills
GU-815-00	PCT, 00 w/ Drills	GU-815-02X	PCT, 02X w/ Drills
GU-815-00X	PCT, 00X w/ Drills	GU-815-03	PCT, 03 w/ Drills
GU-815-01	PCT, 01 w/ Drills	GU-815-04	PCT, 04 w/ Drills
GU-815-01X	PCT, 01X w/ Drills	200919	PCT, 05 w/ Drills


FILTER SCREEN OPTIONS

PART #	DESCRIPTION
GU-818-40	Filter Screen, 40 Mesh
GU-818-60	Filter Screen, 60 Mesh
GU-818-80 (‡)	Filter Screen, 80 Mesh

SIDE SEAL OPTIONS

PART #	DESCRIPTION
202247	Side Seal, 125, Steel
202248	Side Seal, 125, Delrin
202454 (‡)	Side Seal, 125, Engr Resin


PMC PX-7 SPRAY & POUR GUN

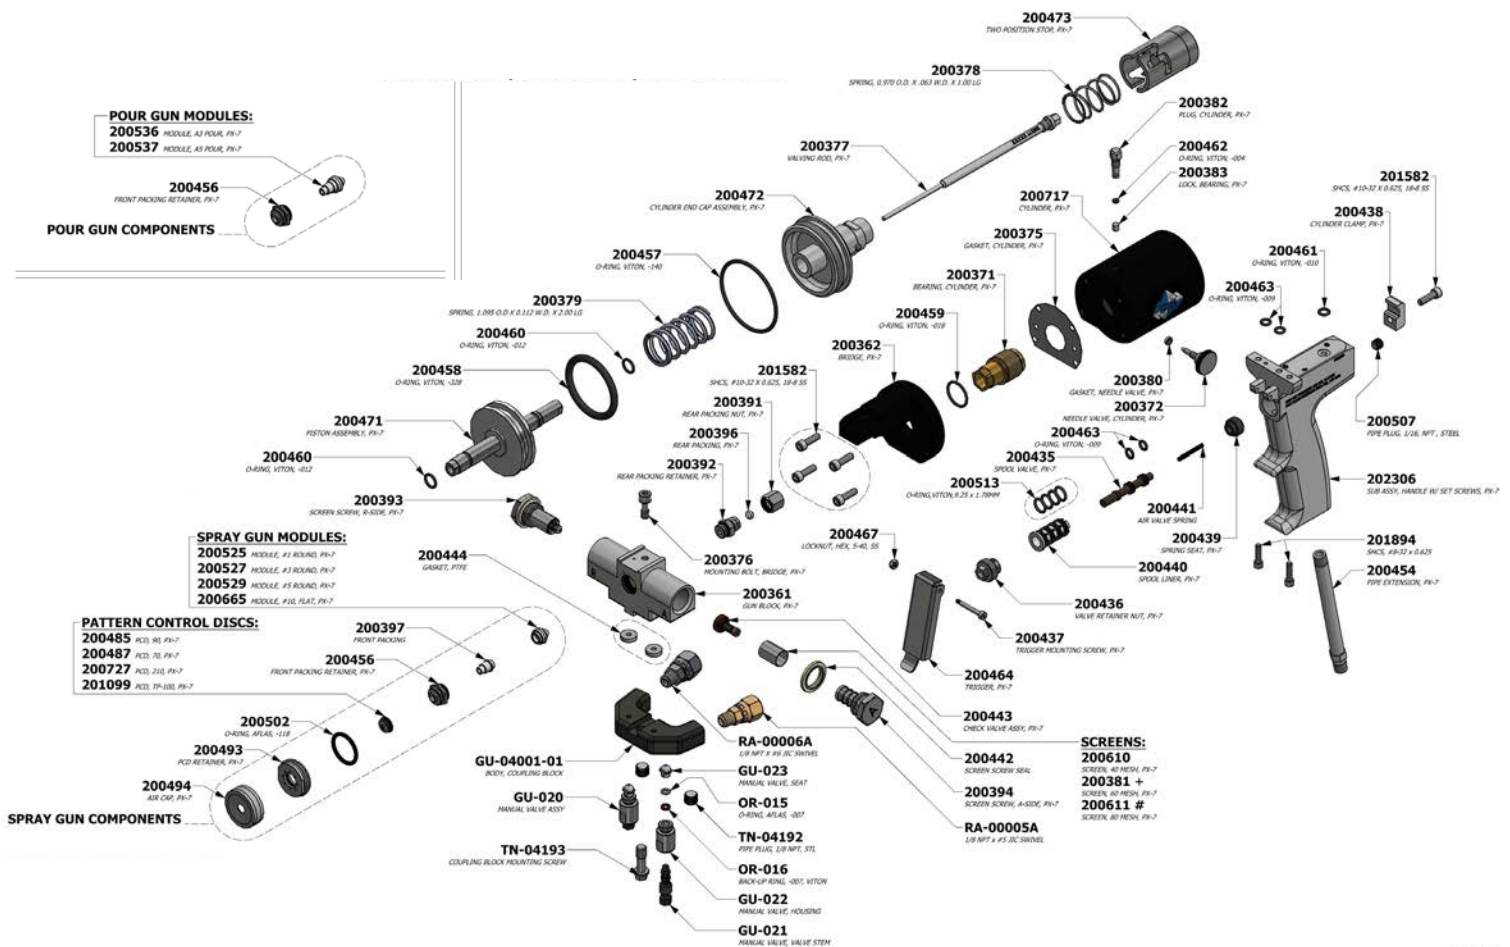

MODULE KITS

PART #	DESCRIPTION	PART #	DESCRIPTION
200547	Module Kit, #1 Round, PX-7 (W/drills)	200553	Module Kit, #10 Flat, PX-7 (W/drills)
200549	Module Kit, #3 Round, PX-7 (W/drills)	200558	Module Kit, A3 Pour, PX-7 (W/drills)
200551	Module Kit, #5 Round, PX-7 (W/drills)	200559	Module Kit, A5 Pour, PX-7 (W/drills)

PMC PROPORTIONERS

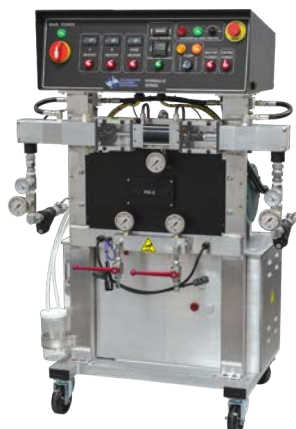

PHX-2

OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 7.5KW HEATERS	ELECTRICAL @ 10.5KW HEATERS	ELECTRICAL @ 14KW HEATERS
1.7 gal/min (6.43 liters/min)	3000 psi (206 bar)	210 ft (64 m) w/70V T 310 ft (94.5 m) w/90V T 410 ft (121.9 m) w/120V T	14,000 watts (single htr)	70 V, 90 V or 120 V	190 °F (87.7 °C)	415 lbs (188 kg)	Not Applicable	Not Applicable	62 amps @ 3 x 230V 105 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
106134	PHX2,5HP,230V,1PH,90T,14KW	106434	PHX2,5HP,230V,1PH,RV,90T,14KW
106234	PHX2,5HP,230V,3PH,90T,14KW	106534	PHX2,5HP,230V,3PH,RV,90T,14KW
106244	PHX2,5HP,230V,3PH,120T,14KW	106544	PHX2,5HP,230V,3PH,RV,120T,14KW
106334	PHX2,5HP,380V,3PH,90T,14KW	106634	PHX2,5HP,380V,3PH,RV,90T,14KW
106344	PHX2,5HP,380V,3PH,120T,14KW		



PHX-25

OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 8KW HEATERS	ELECTRICAL @ 10KW HEATERS	ELECTRICAL @ 12KW HEATERS	ELECTRICAL @ 15KW HEATERS
1.9 gal/min (7.19 liters/min)	3000 psi (206 bar)	310 ft (94.5 m)	8,000 watts (Total) 10,000 watts (Total) 12,000 watts (Total) 15,000 watts (Total)	90 Volts	190 °F (87.7 °C)	500 lbs (228.6 kg)	43 amps @ 3 x 230V 71 amps @ 1 x 230V	48 amps @ 3 x 230V 79 amps @ 1 x 230V	62 amps @ 3 x 230V 105 amps @ 1 x 230V	61 amps @ 3 x 230V 101 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
102131	PHX25,3HP,230V,1PH,90T,8KW	102333	PHX25,3HP,380V,3PH,90T,12KW
102132	PHX25,3HP,230V,1PH,90T,10KW	102343	PHX25,3HP,380V,3PH,120T,12KW
102133	PHX25,3HP,230V,1PH,90T,12KW	102433	PHX25,3HP,230V,1PH,RV,90T,12KW
102232	PHX25,3HP,230V,3PH,90T,10KW	102533	PHX25,3HP,230V,3PH,RV,90T,12KW
102233	PHX25,3HP,230V,3PH,90T,12KW		

POLYUREA COATINGS

PHX-40



OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 15KW HEATERS	ELECTRICAL @ 18KW HEATERS	ELECTRICAL @ 21KW HEATERS
2.8 gal/min (10.59 liters/min)	3500 psi (241 bar)	410 ft (121.9 m)	15,000 watts (Total) 18,000 watts (Total) 21,000 watts (Total)	120 Volts	190 °F (87.7 °C)	555 lbs (251.7 kg)	70 amps @ 3 x 230V 118 amps @ 1 x 230V	77 amps @ 3 x 230V 131 amps @ 1 x 230V	85 amps @ 3 x 230V 144 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
104142	PHX40,5HP,230V,1PH,120T,15KW	104432	PHX40,5HP,230V,1PH,RV,90T,15KW
104143	PHX40,5HP,230V,1PH,120T,18KW	104442	PHX40,5HP,230V,1PH,RV,120T,15KW
104242	PHX40,5HP,230V,3PH,120T,15KW	104443	PHX40,5HP,230V,1PH,RV,120T,18KW
104243	PHX40,5HP,230V,3PH,120T,18KW	104543	PHX40,5HP,230V,3PH,RV,120T,18KW
104244	PHX40,5HP,230V,3PH,120T,21KW	104544	PHX40,5HP,230V,3PH,RV,120T,21KW
104343	PHX40,5HP,380V,3PH,120T,18KW	104644	PHX40,5HP,380V,3PH,RV,120T,21KW
104344	PHX40,5HP,380V,3PH,120T,21KW		

PHX-55




OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 21KW HEATERS	DIMENSIONS
3.25 gal/min (12.3 liters/min)	3500 psi (241 bar)	410 ft (121.9 m)	21,000 watts (Total)	120 Volts	190 °F (87.7 °C)	655 lbs (297.1 kg)	98 amps @ 3 x 230V	40" w x 53.5" h x 26" d (101.6cm x 135.9cm x 66cm)

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
113244	PHX55,7.5HP,230V,3PH,120T,21KW	113544	PHX55,7.5HP,230V,3PH,RV,120T,21KW

PMC PROPORTIONERS

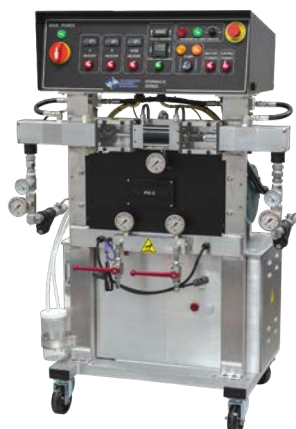

PH-2

OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT(W/O HYDRAULIC FLUID)	ELECTRICAL @ 7.5KW HEATERS	ELECTRICAL @ 10.5KW HEATERS	ELECTRICAL @ 14KW HEATERS
28 lbs/min (12.70 kg/min)	2000 psi (138 bar)	210 ft (64 m) w/70V T 310 ft (94.5 m) w/90V T 410 ft (121.9 m) w/120V T	7,500 watts (single htr) 10,500 watts (single htr) 14,000 watts (single htr)	70 V, 90 V or 120 V	190 °F (87.7 °C)	415 lbs (188 kg)	42 amps @ 3 x 230V 63 amps @ 1 x 230V	49 amps @ 3 x 230V 82 amps @ 1 x 230V	58 amps @ 3 x 230V 97 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
105122	PH2,3HP,230V,1PH,70T,7.5KW	105434	PH2,3HP,230V,1PH,RV,90T,10.5KW
105132	PH2,3HP,230V,1PH,90T,7.5KW	105442	PH2,3HP,230V,1PH,RV,120T,7.5KW
105133	PH2,3HP,230V,1PH,90T,9KW	105444	PH2,3HP,230V,1PH,RV,120T,10.5KW
105134	PH2,3HP,230V,1PH,90T,10.5KW	105532	PH2,3HP,230V,3PH,RV,90T,7.5KW
105142	PH2,3HP,230V,1PH,120T,7.5KW	105534	PH2,3HP,230V,3PH,RV,90T,10.5KW
105243	PH2,3HP,230V,3PH,120T,9KW	105542	PH2,3HP,230V,3PH,RV,120T,7.5KW
105244	PH2,3HP,230V,3PH,120T,10.5KW	105544	PH2,3HP,230V,3PH,RV,120T,10.5KW
105334	PH2,3HP,380V,90T,10.5KW	105545	PH2,3HP,230V,3PH,RV,120T,14KW
105433	PH2,3HP,230V,1PH,RV,90T,9KW		



PH-25

OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 8KW HEATERS	ELECTRICAL @ 10KW HEATERS	ELECTRICAL @ 12KW HEATERS	ELECTRICAL @ 15KW HEATERS
30 lbs/min (13.6 kg/min)	2000 psi (138 bar)	310 ft (94.5 m)	8,000 w (Total) 10,000 w (Total) 12,000 w (Total) 15,000 w (Total)	90 Volts	190 °F (87.7 °C)	500 lbs (228.6 kg)	43 amps @ 3 x 230V 71 amps @ 1 x 230V	48 amps @ 3 x 230V 79 amps @ 1 x 230V	62 amps @ 3 x 230V 105 amps @ 1 x 230V	61 amps @ 3 x 230V 101 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
101132	PHX25,3HP,230V,1PH,90T,8KW	101435	PH25,3HP,230V,1PH, RV, 90T,15KW
101133	PHX25,3HP,230V,1PH,90T,10KW	101442	PH25,3HP,230V,1PH,RV,120T,10KW
101135	PHX25,3HP,230V,1PH,90T,12KW	101443	PH25,3HP,230V,1PH,RV,120T,12KW
101233	PHX25,3HP,230V,3PH,90T,10KW	101532	PH25,3HP,230V,3PH,RV,90T,10KW
101235	PHX25,3HP,230V,3PH,90T,12KW	101534	PH25,3HP,230V,3PH,RV,90T,15KW
101245	PH25,3HP,230V,3PH,120T,15KW	101542	PH25,3HP,230V,3PH,RV,120T,10KW
101433	PH25,3HP,230V,1PH,RV,90T,12KW	101545	PH25,3HP,230V,3PH,RV,120T,15KW

SPRAY/POUR FOAM

PH-40



OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 15KW HEATERS	ELECTRICAL @ 18KW HEATERS	ELECTRICAL @ 21KW HEATERS
40 lbs/min (18.14 kg/min)	2000 psi (138 bar)	410 ft (121.9 m)	15,000 watts (Total) 18,000 watts (Total) 21,000 watts (Total)	120 Volts	190 °F (87.7 °C)	555 lbs (251.7 kg)	70 amps @ 3 x 230V 118 amps @ 1 x 230V	77 amps @ 3 x 230V 131 amps @ 1 x 230V	85 amps @ 3 x 230V 144 amps @ 1 x 230V

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
103132	PH40,5HP,230V,1PH,90T,15KW	103442	PH40,5HP,230V,1PH,RV,120T,15KW
103142	PH40,5HP,230V,1PH,120T,15KW	103443	PH40,5HP,230V,1PH,RV,120T,18KW
103143	PH40,5HP,230V,1PH,120T,18KW	103542	PH40,5HP,230V,3PH,RV,120T,15KW
103242	PH40,5HP,230V,3PH,120T,15KW	103543	PH40,5HP,230V,3PH,RV,120T,18KW
103243	PH40,5HP,230V,3PH,120T,18KW	103544	PH40,5HP,230V,3PH,RV,120T,21KW
103244	PH40,5HP,230V,3PH,120T,21KW	103643	PH40,5HP,380V,RV,120T,18KW
103343	PH40,5HP,380V,3PH,120T,18KW	202294	PH40,5HP,460V,3PH,120T,18KW

PH-55



OUTPUT*	MAX. WORKING PRESSURE	MAX. HOSE LENGTH	HEATER WATTAGE	HOSE HEATING POWER	MAXIMUM FLUID TEMP	WEIGHT (W/O HYDRAULIC FLUID)	ELECTRICAL @ 21KW HEATERS	DIMENSIONS
55 lbs/min (24.95 kg/min)	2500 psi (172.37 bar)	410 ft (121.9 m)	21,000 watts (Total)	120 Volts	190 °F (87.7 °C)	655 lbs (297.1 kg)	98 amps @ 3 x 230V	40" w x 53.5" h x 26" d (101.6cm x 135.9cm x 66cm)

ORDERING INFORMATION

PART #	DESCRIPTION	PART #	DESCRIPTION
112244	PH55,7.5HP,230V,3PH,120T,21KW	112544	PH55,7.5HP,230V,3PH,RV,120T,21KW
112344	PH55,7.5HP,380V,3PH,120T,21KW	112644	PH55,7.5HP,380V,3PH,RV,120T,21KW

PMC

HOSES & ACCESSORIES



LOW PRESSURE HOSE WITH SCUFF (2250 PSI)

PART #	DESCRIPTION
200002	3/8" x 50' HoseAs, LP, W/RTD,W/Scuff
200005	3/8" x 50' HoseAsy, LP, NoTC,W/Scuff
200006	3/8" x 50' HoseAsy, LP, W/TC,W/Scuff
200016	1/2" x 50' HoseAsy, LP, NoTC,W/Scuff
200017	1/2" x 50' HoseAsy, LP, W/TC,W/Scuff
200018	1/2" x 50' HoseAsy, LP, W/RTD,W/Scuff

HIGH PRESSURE HOSE WITH SCUFF (3500 PSI)

PART #	DESCRIPTION	PART #	DESCRIPTION
200007	3/8" x 50' HoseAsy,HP,NoTC,W/Scuff	200224	1/2" x 50' HoseAsy,HP,W/TC,W/Scuff
200019	1/2" x 50' HoseAsy,HP,NoTC,W/Scuff		

HIGH PRESSURE WHIP (3500 PSI)

PART #	DESCRIPTION	PART #	DESCRIPTION
MA-00040A	1/4" X 10' Whip Hose,HP	MA-00040-50	1/4" X 50' Whip Hose,HP,W/Scuff
MA-00040A-25	1/4" X 25' Whip Hose,HP,W/Scuff		

HOSE TEMPERATURE SENSING UNIT (TSU)

PART #	DESCRIPTION	PART #	DESCRIPTION
EL-51A-4	TSU Thermocouple	EL-00051A-5	1/4 x #6 JIC Female Swivel Ftg
EL-51A-2	Flex Thermocouple	EL-00051A-6	1/4 x #6 JIC Male Ftg
EL-00051A-1	Thermocouple Block	EL-00051A-7	1/4 x #5 JIC Female Swivel Ftg
EL-00051A-3	1/8 x #4 JIC Female Swivel Ftg	EL-00051A-8	Insulation
EL-00051A-4	1/4 x #5 JIC Male Ftg		

NOTES

[illegible]



CONTACT US

686 S. ADAMS ST.
KANSAS CITY, KS 66105
1-800-321-0906

CUSTOMERSERVICE@VERSAFLEX.COM
VERSAFLEX.COM

